

Features

- Rugged industrial case with handle
- Single button activation
- Measures both overvoltage and in-line resistance
- High accuracy peak reading circuit
- Precise auto-sensing shutoff
- Precision in-line resistance measurement

Applications

Suitable for testing:

- 5-pin surge protectors
- 4-pin surge protectors (requires optional adapter)
- 1-pin surge protectors (requires optional adapter)

4040 Series 5-Pin Module Surge Protector Test Set

Description

The Bourns® Model 4040 Series 5-Pin Module Surge Protector Test Set is a handheld or mounted tester designed to measure the clamping voltage, DC breakdown voltage and in-line resistance of any 5-pin module. Testing is based on Telcordia GR-974 Standards limits of 215 V to 600 V for a Standard 5-pin, or 215 V to 800 V for a Carbon Block 5-pin. There is also an in-line resistance test of less than 22 ohms.

The Model 4040 Series has a one-button testing sequence which will test TIP to GROUND, RING to GROUND, TIP-in to TIP-out and RING-in to RING-out. If all criteria are met, a green LED will be lit. During any testing sequence, if the tester detects a failure, the tester will stop the test and a red LED will be lit. The tester has an auto-shutoff feature which will turn off after five minutes of inactivity.

Power is supplied via an AC/DC adapter or optional battery.

Operation

Holding the test button and then releasing will apply a linear ramp to the device under test. Sensing circuitry automatically terminates the test when either the DC breakdown or 1 mA clamping voltage is reached. The test value is compared to the internal memory table to determine a Pass/Fail criteria, then moves on to the next sequence. The Pass/Fail LED will stay lit for approximately 3 seconds. For testing the Carbon Block, pressing the button twice will enable the tester to use an alternate table criteria and the Pass/Fail LED will blink instead of remaining steadily lit.

Specifications

Open Circuit Voltage Rate of Rise.....	Between 1 kV to 2 KV/s
Maximum Tested Output Voltage.....	1000 V
Useable Measuring Range	
Standard 5-pin	215 - 600 V
Carbon Block 5-pin	215 - 800 V
Test Current for Clamping Devices.....	1 mA ±10 %
Test Current for Crowbar Devices	> 1 A
In-line Resistance Measurement.....	< 22 ohms
Operating Temperature.....	0 to +50 °C
Storage Temperature.....	-10 to +60 °C
Measurement Accuracy	0.5 %
Power Source	18 Vdc
Optional Batteries	
Battery Life (Based on continuous cycles with a known good device of 350 V)	
Alkaline.....	> 1,000 tests
Lithium	> 2,000 tests
Shipping Weight	3 lbs.
Warranty	2 years

BOURNS®

Asia-Pacific: Tel: +886-2 2562-4117 • Email: asiacus@bourns.com

EMEA: Tel: +36 88 885 877 • Email: eurocus@bourns.com

The Americas: Tel: +1-951 781-5500 • Email: americus@bourns.com

www.bourns.com

Specifications are subject to change without notice.


Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf.

4040 Series 5-Pin Module Surge Protector Test Set



Product Dimensions (Approximate, Rounded up to the Nearest 0.1 Inch)

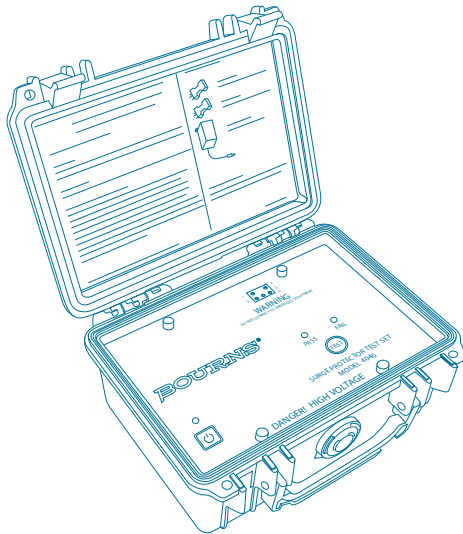

Width 8.25 ”
 Length..... 6.50 ”
 Height 3.50 ”
 Height with Lid Open 9.25 ”

How To Order

4040 - 01 - W

Model Number Designator _____

Tester Configuration _____

01 = Standard Tester

Mounting Configuration _____

(Blank) = Portable

W = Wall Mount / Frame Mount

Part No.	Accessories Included
4040-01	Portable – 1 each P/N 50504-01 120 Vac to 18 Vdc Adapter
4040-01-W	Wall Mount (DIN-Rail type) – 1 each P/N 50504-01 120 Vac to 18 Vdc Adapter 1 each Wall Mount Kit

Part No.	Available Separately
50504-01	120 Vac to 18 Vdc Adapter
72292.....	1-pin to 5-pin Adapter
72293.....	4-pin to 5-pin Adapter
72296.....	5-pin Verification Kit

REV. C 10/19

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf.

This legal disclaimer applies to purchasers and users of Bourns® products manufactured by or on behalf of Bourns, Inc. and its affiliates (collectively, “Bourns”).

Unless otherwise expressly indicated in writing, Bourns® products and data sheets relating thereto are subject to change without notice. Users should check for and obtain the latest relevant information and verify that such information is current and complete before placing orders for Bourns® products.

The characteristics and parameters of a Bourns® product set forth in its data sheet are based on laboratory conditions, and statements regarding the suitability of products for certain types of applications are based on Bourns’ knowledge of typical requirements in generic applications. The characteristics and parameters of a Bourns® product in a user application may vary from the data sheet characteristics and parameters due to (i) the combination of the Bourns® product with other components in the user’s application, or (ii) the environment of the user application itself. The characteristics and parameters of a Bourns® product also can and do vary in different applications and actual performance may vary over time. Users should always verify the actual performance of the Bourns® product in their specific devices and applications, and make their own independent judgments regarding the amount of additional test margin to design into their device or application to compensate for differences between laboratory and real world conditions.

Unless Bourns has explicitly designated an individual Bourns® product as meeting the requirements of a particular industry standard (e.g., ISO/TS 16949) or a particular qualification (e.g., UL listed or recognized), Bourns is not responsible for any failure of an individual Bourns® product to meet the requirements of such industry standard or particular qualification. Users of Bourns® products are responsible for ensuring compliance with safety-related requirements and standards applicable to their devices or applications.

Bourns® products are not recommended, authorized or intended for use in nuclear, lifesaving, life-critical or life-sustaining applications, nor in any other applications where failure or malfunction may result in personal injury, death, or severe property or environmental damage. Unless expressly and specifically approved in writing by two authorized Bourns representatives on a case-by-case basis, use of any Bourns® products in such unauthorized applications might not be safe and thus is at the user’s sole risk. Life-critical applications include devices identified by the U.S. Food and Drug Administration as Class III devices and generally equivalent classifications outside of the United States.

Bourns expressly identifies those Bourns® standard products that are suitable for use in automotive applications on such products’ data sheets in the section entitled “Applications.” Unless expressly and specifically approved in writing by two authorized Bourns representatives on a case-by-case basis, use of any other Bourns® standard products in an automotive application might not be safe and thus is not recommended, authorized or intended and is at the user’s sole risk. If Bourns expressly identifies a sub-category of automotive application in the data sheet for its standard products (such as infotainment or lighting), such identification means that Bourns has reviewed its standard product and has determined that if such Bourns® standard product is considered for potential use in automotive applications, it should only be used in such sub-category of automotive applications. Any reference to Bourns® standard product in the data sheet as compliant with the AEC-Q standard or “automotive grade” does not by itself mean that Bourns has approved such product for use in an automotive application.

Bourns® standard products are not tested to comply with United States Federal Aviation Administration standards generally or any other generally equivalent governmental organization standard applicable to products designed or manufactured for use in aircraft or space applications. Bourns expressly identifies Bourns® standard products that are suitable for use in aircraft or space applications on such products’ data sheets in the section entitled “Applications.” Unless expressly and specifically approved in writing by two authorized Bourns representatives on a case-by-case basis, use of any other Bourns® standard product in an aircraft or space application might not be safe and thus is not recommended, authorized or intended and is at the user’s sole risk.

The use and level of testing applicable to Bourns® custom products shall be negotiated on a case-by-case basis by Bourns and the user for which such Bourns® custom products are specially designed. Absent a written agreement between Bourns and the user regarding the use and level of such testing, the above provisions applicable to Bourns® standard products shall also apply to such Bourns® custom products.

Users shall not sell, transfer, export or re-export any Bourns® products or technology for use in activities which involve the design, development, production, use or stockpiling of nuclear, chemical or biological weapons or missiles, nor shall they use Bourns® products or technology in any facility which engages in activities relating to such devices. The foregoing restrictions apply to all uses and applications that violate national or international prohibitions, including embargos or international regulations. Further, Bourns® products and Bourns technology and technical data may not under any circumstance be exported or re-exported to countries subject to international sanctions or embargoes. Bourns® products may not, without prior authorization from Bourns and/or the U.S. Government, be resold, transferred, or re-exported to any party not eligible to receive U.S. commodities, software, and technical data.

To the maximum extent permitted by applicable law, Bourns disclaims (i) any and all liability for special, punitive, consequential, incidental or indirect damages or lost revenues or lost profits, and (ii) any and all implied warranties, including implied warranties of fitness for particular purpose, non-infringement and merchantability.

For your convenience, copies of this Legal Disclaimer Notice with German, Spanish, Japanese, Traditional Chinese and Simplified Chinese bilingual versions are available at:

Web Page: <http://www.bourns.com/legal/disclaimers-terms-and-policies>

PDF: <http://www.bourns.com/docs/Legal/disclaimer.pdf>