

Features

- Very compact design - doubles pair-density compared to older 303-type connector blocks; provides generous working space between connectors
- Front-facing jumper and test field - reduced jumper installation time plus easy access to test field
- Industry-standard configuration accepts all standard 303-type protector modules
- Multiple grounding options - choice of frame or isolated grounding

Model C(G)-391 100-Pair Connector

Bourns® C(G)-391 Connector is our most compact 100-pair central/remote office connector. This 238 mm high (9.37 in.), narrow-profile connector is designed to increase frame capacity without sacrificing valuable workspace. One 303-type connector can be replaced by two C(G)-391 connectors – doubling the pair count in the same space.

The C(G)-391 connector is ideal for use in remote switch and digital line carrier locations, as frame space in huts and controlled environment vaults (CEVs) is usually at a premium. The C(G)-391 connector is also compatible with Private Automatic Branch Exchange (PABX) and Centrex systems that use combination frame configurations – where terminal blocks and connectors are mounted on the same side of the frame. It also provides an excellent termination point for protector frame systems that use separate intermediate distribution frames for cross-connecting.

The C(G)-391 connector's narrow profile provides 114 mm (4.5 in.) of work space between adjacent connectors, allowing ample room for cross-connect (jumper) wiring and frame administration. The angled mounting allows easy access to the individual protector units, arranged in a 10x10 configuration. The front facing jumper and test fields are always within reach and the front and rear snap-through fanning strips encourage orderly wire management to simplify maintenance efforts. The stub cable and jumper wire terminations are completed using wire-wrap technology.

The C(G)-391 connector may be ordered stubless or with 22 or 24 AWG stub cable. Connectors equipped with a stub cable are shipped in the stub-down orientation. The stub direction may be reversed in the field as required.

The C(G)-391 connector accepts the full line of industry-standard 303-type, 5-pin protector modules including Bourns® hybrid, solid-state and gas tube modules. The protector module contacts in the C(G)-391 connector are available with either tin-alloy or gold-plating. Accordingly, the plating on the pins of the protector modules should match the connector to ensure optimal performance.

Specifications

Plastic Materials

Main Body Polycarbonate, ivory, UL 94V-0

Metal Parts

Mounting Hardware..... Steel, zinc-plated

Current-Carrying Components..... Copper or copper alloys, tin-plated

Cable Stub

Description 22 or 24 AWG, 100-pair; bonded or unbonded PVC jacket, locking swivel mount

Pressure..... Unpressurized

Termination Wire-wrap

Grounding #10 AWG cable ground (drain wire) to mounting bracket

Resistance <5 milliohms (from cable shield bond to connector ground reference)

Cross-Connect (Jumper) Connections

Termination Wire-wrap

Contact Resistance..... < 2 milliohms

Dielectric Strength..... > 1500 VDC and >1000 VAC @ 50-60 Hz for two minutes

Insulation Resistance..... > 30 megohms @ 1000 VDC

Environmental Conditions..... Operating environment with temperature ranging from 0 °C (+32 °F) to +50 °C (+122 °F) up to 95% R.H.

Temperature Characteristics

High Temperature +60 °C (+140 °F) without deformation

Frame Vertical Capacities

Height 2.13 m (7.0 ft.) 700 pairs

Height 2.44 m (8.0 ft.) 800 pairs

Height 2.74 m (9.0 ft.) 1000 pairs

Height 3.51 m (11.5 ft.) 1200 pairs

Height 4.27 m (14.0 ft.) 1700 pairs

Specifications are subject to change without notice.


Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf

Model C(G)-391 100-Pair Connector

BOURNS®

Product Dimensions

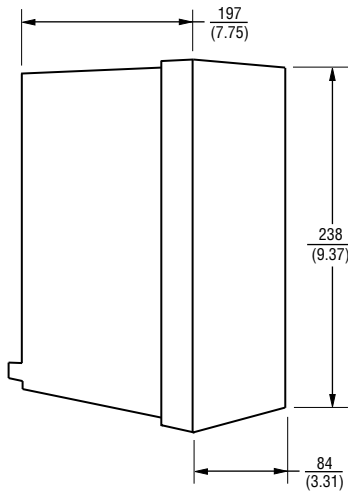

DIMENSIONS: $\frac{\text{MM}}{\text{(INCHES)}}$

Packaging Specifications

Product Code	Std. Pack	Stub Length m (ft.)	Size (H x W x D) mm (in.)	Weight kg (lb.)
Stubless				
NT8Gx0AA	1	0	310 x 360 x 180 (12 x 14 x 7)	3.2 (7)
22 AWG Stub				
NT8GxxAG	1	9.1 (30)	790 x 790 x 150 (31 x 31 x 6)	13.2 (29)
NT8GxxAL	1	15.2 (50)	790 x 790 x 150 (31 x 31 x 6)	20.0 (44)
NT8GxxAS	1	24.4 (80)	790 x 790 x 150 (31 x 31 x 6)	29.5 (65)
NT8GxxBA	1	30.5 (100)	790 x 790 x 300 (31 x 31 x 12)	36.3 (80)
24 AWG Stub				
NT8GxxAG	1	9.1 (30)	790 x 790 x 150 (31 x 31 x 6)	10.0 (22)
NT8GxxAL	1	15.2 (50)	790 x 790 x 150 (31 x 31 x 6)	14.1 (31)
NT8GxxAS	1	24.4 (80)	790 x 790 x 150 (31 x 31 x 6)	20.4 (45)
NT8GxxBA	1	30.5 (100)	790 x 790 x 300 (31 x 31 x 12)	24.9 (55)

How to Order

Product Code	Part Number	Description
Stubless		
NT8G10AA	A0352994	NT8G10AA, 100-PR, WW, Gold, Right Mount
NT8G20AA	A0409909	NT8G20AA, 100-PR, WW, Gold, Angle Mount
NT8G80AA	A0353600	NT8G80AA, 100-PR, WW, Tin, Left Mount
Gold, Angle Mount, Frame Ground, 24 AWG, Bonded Cable		
NT8G13AG	NT8G13AG	NT8, 100-PR, WW, 24 AWG, 30' STUB, Down, NO MODS, Gold, Angle Mount
NT8G13AL	NT8G13AL	NT8, 100-PR, WW, 24 AWG, 50' STUB, Down, NO MODS, Gold, Angle Mount
NT8G13AS	NT8G13AS	NT8, 100-PR, WW, 24 AWG, 80' STUB, Down, NO MODS, Gold, Angle Mount
NT8G13BA	NT8G13BA	NT8, 100-PR, WW, 24 AWG, 100' STUB, Down, NO MODS, Gold, Angle Mount
Gold, Angle Mount, Frame Ground, 22 AWG, Bonded Cable		
NT8G14AG	NT8G14AG	NT8, 100-PR, WW, 22 AWG, 30' STUB, Down, NO MODS, Gold, Angle Mount
NT8G14AL	NT8G14AL	NT8, 100-PR, WW, 22 AWG, 50' STUB, Down, NO MODS, Gold, Angle Mount
NT8G14AS	NT8G14AS	NT8, 100-PR, WW, 22 AWG, 80' STUB, Down, NO MODS, Gold, Angle Mount
NT8G14BA	NT8G14BA	NT8, 100-PR, WW, 22 AWG, 100' STUB, Down, NO MODS, Gold, Angle Mount
Gold, Right Mount, Frame Ground, 22 AWG, Bonded Cable		
NT8G14JG	NT8G14JG	NT8, 100-PR, WW, 22 AWG, 30' STUB, Down, NO MODS, Gold, Right Mount
NT8G14JL	NT8G14JL	NT8, 100-PR, WW, 22 AWG, 50' STUB, Down, NO MODS, Gold, Right Mount
NT8G14JS	NT8G14JS	NT8, 100-PR, WW, 22 AWG, 80' STUB, Down, NO MODS, Gold, Right Mount
NT8G14KA	NT8G14KA	NT8, 100-PR, WW, 22 AWG, 100' STUB, Down, NO MODS, Gold, Right Mount

Note: Order by Part Number.

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf

Model C(G)-391 100-Pair Connector

BOURNS®

How to Order (Continued)

Product Code	Part Number	Description
Gold, Straight Mount, Frame Ground, 24 AWG, Bonded Cable		
NT8G13JG	NT8G13JG	NT8, 100-PR, WW, 24 AWG, 30 ´ STUB, Down, NO MODS, Gold, Straight Mount
NT8G13JL	NT8G13JL	NT8, 100-PR, WW, 24 AWG, 50 ´ STUB, Down, NO MODS, Gold, Straight Mount
NT8G13JS	NT8G13JS	NT8, 100-PR, WW, 24 AWG, 80 ´ STUB, Down, NO MODS, Gold, Straight Mount
NT8G13KA	NT8G13KA	NT8, 100-PR, WW, 24 AWG, 100 ´ STUB, Down, NO MODS, Gold, Straight Mount
Gold, Angle Mount, Frame Ground, 24 AWG, Bonded Cable		
NT8G23AG	NT8G23AG	NT8, 100-PR, WW, 24 AWG, 30 ´ STUB, Down, NO MODS, Gold, Angle Mount
NT8G23AL	NT8G23AL	NT8, 100-PR, WW, 24 AWG, 50 ´ STUB, Down, NO MODS, Gold, Angle Mount
NT8G23AS	NT8G23AS	NT8, 100-PR, WW, 24 AWG, 80 ´ STUB, Down, NO MODS, Gold, Angle Mount
NT8G23BA	NT8G23BA	NT8, 100-PR, WW, 24 AWG, 100 ´ STUB, Down, NO MODS, Gold, Angle Mount
Gold, Angle Mount, Frame Ground, 22 AWG, Bonded Cable		
NT8G24AG	NT8G24AG	NT8, 100-PR, WW, 22 AWG, 30 ´ STUB, Down, NO MODS, Gold, Angle Mount
NT8G24AL	NT8G24AL	NT8, 100-PR, WW, 22 AWG, 50 ´ STUB, Down, NO MODS, Gold, Angle Mount
NT8G24AS	NT8G24AS	NT8, 100-PR, WW, 22 AWG, 80 ´ STUB, Down, NO MODS, Gold, Angle Mount
NT8G24BA	NT8G24BA	NT8, 100-PR, WW, 22 AWG, 100 ´ STUB, Down, NO MODS, Gold, Angle Mount
Tin, Left Mount, Isolated Ground, 24 AWG, Bonded Cable		
NT8G83AG	A0355687	NT8G83AG, 100-PR, WW, 24 AWG, 30 ´ STUB, Down, NO MODS, Tin, Left Mount
NT8G83AL	A0355689	NT8G83AL, 100-PR, WW, 24 AWG, 50 ´ STUB, Down, NO MODS, Tin, Left Mount
NT8G83AS	A0355690	NT8G83AS, 100-PR, WW, 24 AWG, 80 ´ STUB, Down, NO MODS, Tin, Left Mount
Tin, Left Mount, Isolated Ground, 22 AWG, Bonded Cable		
NT8G84AG	A0355693	NT8G84AG, 100-PR, WW, 22 AWG, 30 ´ STUB, Down, NO MODS, Tin, Left Mount
NT8G84BA	A0355697	NT8G84BA, 100-PR, WW, 22 AWG, 100 ´ STUB, Down, NO MODS, Tin, Left Mount

Note: Order by Part Number.

BOURNS®

Asia-Pacific: Tel: +886-2 2562-4117 • Email: asiacus@bourns.com

EMEA: Tel: +36 88 885 877 • Email: eurocus@bourns.com

The Americas: Tel: +1-951 781-5500 • Email: americus@bourns.com

www.bourns.com

REV. C 10/19

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf

This legal disclaimer applies to purchasers and users of Bourns® products manufactured by or on behalf of Bourns, Inc. and its affiliates (collectively, “Bourns”).

Unless otherwise expressly indicated in writing, Bourns® products and data sheets relating thereto are subject to change without notice. Users should check for and obtain the latest relevant information and verify that such information is current and complete before placing orders for Bourns® products.

The characteristics and parameters of a Bourns® product set forth in its data sheet are based on laboratory conditions, and statements regarding the suitability of products for certain types of applications are based on Bourns’ knowledge of typical requirements in generic applications. The characteristics and parameters of a Bourns® product in a user application may vary from the data sheet characteristics and parameters due to (i) the combination of the Bourns® product with other components in the user’s application, or (ii) the environment of the user application itself. The characteristics and parameters of a Bourns® product also can and do vary in different applications and actual performance may vary over time. Users should always verify the actual performance of the Bourns® product in their specific devices and applications, and make their own independent judgments regarding the amount of additional test margin to design into their device or application to compensate for differences between laboratory and real world conditions.

Unless Bourns has explicitly designated an individual Bourns® product as meeting the requirements of a particular industry standard (e.g., ISO/TS 16949) or a particular qualification (e.g., UL listed or recognized), Bourns is not responsible for any failure of an individual Bourns® product to meet the requirements of such industry standard or particular qualification. Users of Bourns® products are responsible for ensuring compliance with safety-related requirements and standards applicable to their devices or applications.

Bourns® products are not recommended, authorized or intended for use in nuclear, lifesaving, life-critical or life-sustaining applications, nor in any other applications where failure or malfunction may result in personal injury, death, or severe property or environmental damage. Unless expressly and specifically approved in writing by two authorized Bourns representatives on a case-by-case basis, use of any Bourns® products in such unauthorized applications might not be safe and thus is at the user’s sole risk. Life-critical applications include devices identified by the U.S. Food and Drug Administration as Class III devices and generally equivalent classifications outside of the United States.

Bourns expressly identifies those Bourns® standard products that are suitable for use in automotive applications on such products’ data sheets in the section entitled “Applications.” Unless expressly and specifically approved in writing by two authorized Bourns representatives on a case-by-case basis, use of any other Bourns® standard products in an automotive application might not be safe and thus is not recommended, authorized or intended and is at the user’s sole risk. If Bourns expressly identifies a sub-category of automotive application in the data sheet for its standard products (such as infotainment or lighting), such identification means that Bourns has reviewed its standard product and has determined that if such Bourns® standard product is considered for potential use in automotive applications, it should only be used in such sub-category of automotive applications. Any reference to Bourns® standard product in the data sheet as compliant with the AEC-Q standard or “automotive grade” does not by itself mean that Bourns has approved such product for use in an automotive application.

Bourns® standard products are not tested to comply with United States Federal Aviation Administration standards generally or any other generally equivalent governmental organization standard applicable to products designed or manufactured for use in aircraft or space applications. Bourns expressly identifies Bourns® standard products that are suitable for use in aircraft or space applications on such products’ data sheets in the section entitled “Applications.” Unless expressly and specifically approved in writing by two authorized Bourns representatives on a case-by-case basis, use of any other Bourns® standard product in an aircraft or space application might not be safe and thus is not recommended, authorized or intended and is at the user’s sole risk.

The use and level of testing applicable to Bourns® custom products shall be negotiated on a case-by-case basis by Bourns and the user for which such Bourns® custom products are specially designed. Absent a written agreement between Bourns and the user regarding the use and level of such testing, the above provisions applicable to Bourns® standard products shall also apply to such Bourns® custom products.

Users shall not sell, transfer, export or re-export any Bourns® products or technology for use in activities which involve the design, development, production, use or stockpiling of nuclear, chemical or biological weapons or missiles, nor shall they use Bourns® products or technology in any facility which engages in activities relating to such devices. The foregoing restrictions apply to all uses and applications that violate national or international prohibitions, including embargos or international regulations. Further, Bourns® products and Bourns technology and technical data may not under any circumstance be exported or re-exported to countries subject to international sanctions or embargoes. Bourns® products may not, without prior authorization from Bourns and/or the U.S. Government, be resold, transferred, or re-exported to any party not eligible to receive U.S. commodities, software, and technical data.

To the maximum extent permitted by applicable law, Bourns disclaims (i) any and all liability for special, punitive, consequential, incidental or indirect damages or lost revenues or lost profits, and (ii) any and all implied warranties, including implied warranties of fitness for particular purpose, non-infringement and merchantability.

For your convenience, copies of this Legal Disclaimer Notice with German, Spanish, Japanese, Traditional Chinese and Simplified Chinese bilingual versions are available at:

Web Page: <http://www.bourns.com/legal/disclaimers-terms-and-policies>

PDF: <http://www.bourns.com/docs/Legal/disclaimer.pdf>