

Features

- High power rating up to 2 W
- Wide terminal thick film
- Resistance range 1 Ω to 1M Ω
- AEC-Q200 compliant
- RoHS compliant*

Applications

- Power supplies
- Industrial controllers
- Digital meters
- LED lighting
- Automotive


CWM-Q Series Wide Terminal Automotive Grade Resistor

Electrical Characteristics

Model	Power Rating @ 70 °C	Max. Voltage		Resistance Range (Ω)	Tolerance	TCR ¹ (PPM)	Standard Resistance Values
		Working	Overload				
CWM0612Q	1 W	200 V	400 V	1 to 4.64	±1 %	±200	E24 & E96
				4.7 to 1M	±1 %	±100	E24 & E96
				1 to 4.3	±5 %	±200	E24
				4.7 to 1M	±5 %	±100	E24
CWM1225Q	2 W			1 to 4.64	±1 %	±200	E24 & E96
				4.7 to 1M	±1 %	±100	E24 & E96
				1 to 4.3	±5 %	±200	E24
				4.7 to 1M	±5 %	±100	E24

1 TCR 25 ~ -55 °C: Below 4.7 ohm is ±250 PPM

Current Rating Thermal Derating Curve

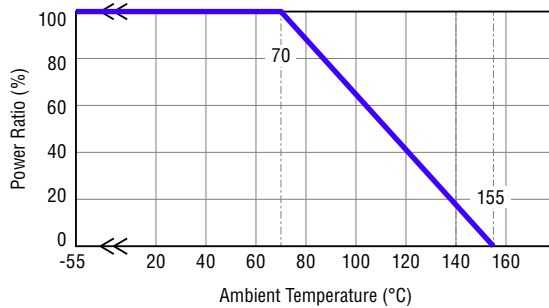

Additional Information

Click these links for more information:



Environmental Characteristics

Operating Temperature -55 °C to +155 °C
 Storage Conditions
 Temperature +5 °C to +35 °C
 Humidity 40 % to 70 %
 Moisture Sensitivity Level..... 1
 ESD Classification
 (per AEC-Q200, HBM)..... 1C



Americas: Tel: +1 951-781-5500 • Email: americus@bourns.com
Mexico: Tel: +52-614-478-0400 • Email: mexicus@bourns.com
Asia: Tel: +886-2-2562-4117 • Email: asiacus@bourns.com
EMEA: Tel: +36 88 885 877 • Email: eurocus@bourns.com
www.bourns.com



CALIFORNIA WARNING: Can expose you to lead, a carcinogen and reproductive toxicant.
 See www.P65Warnings.ca.gov

*RoHS Directive 2015/863, Mar 31, 2015 and Annex.
 Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications. The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf.

CWM-Q Series Wide Terminal Automotive Grade Resistor

BOURNS®

Performance Characteristics

Test	Conditions	Specification	
		Reference	Limit
Temperature Coefficient of Resistance	+25 ~ 155 °C	IEC 60115-1 4.8	Refer to TCR
Short Time Overload	5x rated power for 5 seconds	IEC 60115-1 4.13	J: $\Delta R \leq \pm(2\% +0.5\ \Omega)$ F: $\Delta R \leq \pm(1\% +0.5\ \Omega)$
High Temperature Exposure	1000 hours @ +155 °C	AEC-Q200-REV E-Test 3 MIL-STD-202 Method 108	J: $\Delta R \leq \pm(3\% +0.1\ \Omega)$ F: $\Delta R \leq \pm(1\% +0.1\ \Omega)$
Temperature Cycling	1000 cycles (-55 °C to +125 °C)	AEC-Q200-REV E-Test 4 JESD22 Method JA-104	J: $\Delta R \leq \pm(1\% +0.05\ \Omega)$ F: $\Delta R \leq \pm(0.5\% +0.05\ \Omega)$
Moisture Resistance	65/80 ~ 100 % RH 10 cycles	AEC-Q200 Table 7.6	J: $\Delta R \leq \pm(1\% +0.05\ \Omega)$ F: $\Delta R \leq \pm(0.5\% +0.05\ \Omega)$
Bias Humidity	+85 °C, 85 % RH, 10 % bias, 1000 hours	AEC-Q200-REV E-Test 7 MIL-STD-202 Method 103	J: $\Delta R \leq \pm(3\% +0.1\ \Omega)$ F: $\Delta R \leq \pm(1\% +0.1\ \Omega)$
Mechanical Shock	100 g for 6 ms, half sine shock pulse	AEC-Q200-REV E-Test 13 MIL-STD-202 Method 213	Within product specification tolerance and no visible damage
Vibration	5 g's for 20 min., 10-2 kHz 12 cycles	AEC-Q200-REV E-Test 14 MIL-STD-202 Method 204	No mechanical damage
Operational Life	1000 hours at rated power at +125 °C	AEC-Q200-REV E-Test 8 MIL-STD-202 Method 108	J: $\Delta R \leq \pm(3\% +0.1\ \Omega)$ F: $\Delta R \leq \pm(1\% +0.1\ \Omega)$
Resistance to Solder Heat	+260 \pm 5 °C, 10 \pm 1 second dwell	AEC-Q200-REV E-Test 15 MIL-STD-202 Method 210	J: $\Delta R \leq \pm(1\% +0.05\ \Omega)$ F: $\Delta R \leq \pm(0.5\% +0.05\ \Omega)$
ESD	Human Body Model, 2 kV	AEC-Q200-REV E-Test 17 AEC-Q200-002 ISO/DIS 10605	$\Delta R \leq \pm 5\%$
Solderability	235 \pm 3 °C dipping time: 5 seconds	AEC-Q200-REV E-Test 18 J-STD-002	>95 % tin coverage
Board Flex (SMD)	2 mm deflection	AEC-Q200-REV E-Test 21 AEC-Q200-005	J: $\Delta R \leq \pm(1\% +0.05\ \Omega)$ F: $\Delta R \leq \pm(0.5\% +0.05\ \Omega)$
Shear (SMD)	Force of 1.8 kg for 60 sec.	AEC-Q200-REV E-Test 22 AEC-Q200-006	No mechanical damage
Flammability	Refer UL-94	Per AEC-Q200 - Electrical test not required	V-0 or V-1 is acceptable

Specifications are subject to change without notice.


Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf.

CWM-Q Series Wide Terminal Automotive Grade Resistor



Product Dimensions

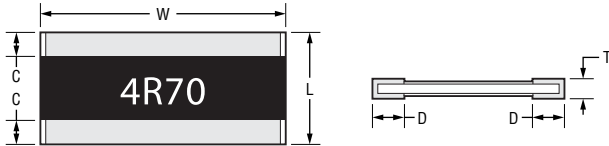

Dim.	L	W	C	D	T
CWM0612Q	1.60 ± 0.20 (.063 ± .008)	3.20 ± 0.20 (.126 ± .008)	0.25 ± 0.20 (.010 ± .008)	0.40 ± 0.20 (.016 ± .008)	0.60 ± 0.15 (.024 ± .006)
CWM1225Q	3.10 ± 0.20 (.122 ± .008)	6.30 ± 0.20 (.248 ± .008)	0.45 ± 0.20 (.018 ± .008)	0.75 ± 0.20 (.030 ± .008)	

DIMENSIONS: $\frac{\text{MM}}{\text{(INCHES)}}$

How to Order

CWM 1225 Q F X - 4R70 E LF

Model _____
 CWM = Wide Terminal
 Chip Resistor

Size _____
 0612 = 0612 (1632)
 1225 = 1225 (3264)

Feature _____
 Q = AEC-Q200 Compliant

Resistance Tolerance _____
 F = ±1 %
 J = ±5 %

TCR _____
 W = ±200 PPM/°C
 X = ±100 PPM/°C

Resistance Value Code _____
1 % Tolerance
 <100 Ω: "R" represents decimal point
 (example: 24R3 = 24.3 Ω)
 >100 Ω: First three digits are significant,
 fourth digit represents number of zeros
 to follow (example: 8252 = 82.5K Ω)

5 % Tolerance
 <10 Ω: "R" represents decimal point
 (example: 4R7 = 4.7 ohms)
 >10 Ω: First two digits are significant,
 third digit represents number of zeros
 to follow (example: 474 = 470K Ω)


Packaging _____
 E = Tape and Reel
 CWM0612Q: 5,000 pcs. / 7-inch reel;
 CWM1225Q: 4,000 pcs. / 7-inch reel

Termination _____
 LF = Tin-plated (RoHS compliant)

CWM-Q Series Wide Terminal Automotive Grade Resistor

BOURNS®

Packaging Dimensions (Conforms to EIA RS-481A)

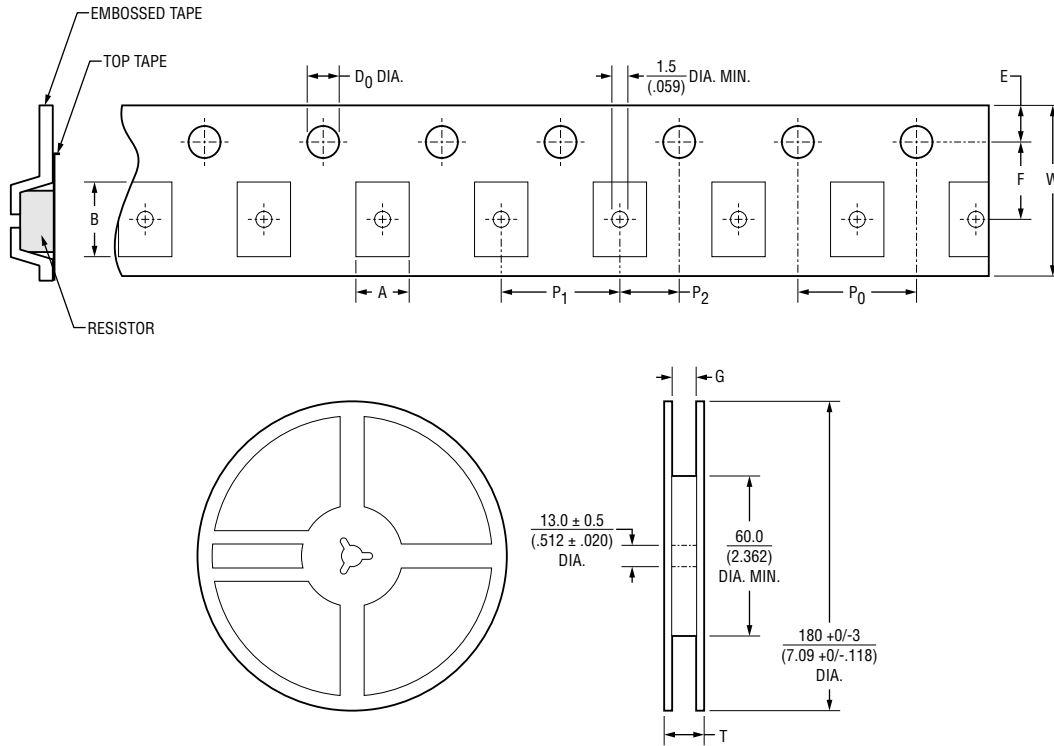

Model	A	B	W	F	E	P ₁	P ₂	P ₀	D ₀	T	G
CWM0612Q (paper tape)	2.0 ± 0.20 (.079 ± .008)	3.6 ± 0.20 (.142 ± .008)	8.0 ± 0.30 (.315 ± .012)	3.5 ± 0.05 (.138 ± .002)	1.75 ± 0.10 (.069 ± .004)	4.0 ± 0.10 (.157 ± .004)	2.0 ± 0.05 (.079 ± .002)	4.0 ± 0.10 (.157 ± .004)	1.5 +0.1/-0 (.059 +.004/-0)	14.3 (.587) MAX.	10.0 ± 1.5 (.394 ± .059)
CWM1225Q (plastic tape)	3.5 ± 0.20 (.138 ± .008)	6.7 ± 0.20 (.264 ± .008)	12.0 ± 0.30 (.472 ± .012)	5.5 ± 0.05 (.217 ± .002)						16.7 (.657) MAX.	13.8 ± 1.5 (.543 ± .059)

DIMENSIONS: $\frac{\text{MM}}{\text{(INCHES)}}$

REV. 08/25

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf.

This legal disclaimer applies to purchasers and users of Bourns® products manufactured by or on behalf of Bourns, Inc. and its affiliates (collectively, "Bourns").

Unless otherwise expressly indicated in writing, Bourns® products and data sheets relating thereto are subject to change without notice. Users should check for and obtain the latest relevant information and verify that such information is current and complete before placing orders for Bourns® products.

The characteristics and parameters of a Bourns® product set forth in its data sheet are based on laboratory conditions, and statements regarding the suitability of products for certain "typical" applications are based on Bourns' knowledge of typical requirements in generic applications. Bourns assumes that "typical" applications include failsafe/backup features to address critical risks to users and are designed to allow rework of Bourns® product to avoid scrap of a device solely due to malfunctioning Bourns® product. The characteristics and parameters of a Bourns® product in a user application may vary from the data sheet characteristics and parameters due to (i) the combination of the Bourns® product with other components in the user's application, or (ii) the environment of the user application itself. The characteristics and parameters of a Bourns® product also can and do vary in different applications and actual performance may vary over time. Thus, users should always verify the actual performance of the Bourns® product in their specific devices and applications and make their own independent judgments regarding the suitability of Bourns® product and the amount of additional test margin to design into their device or application to compensate for differences between laboratory and real-world conditions.

Unless Bourns has explicitly designated an individual Bourns® product as meeting the requirements of a particular industry standard (e.g., IATF 16949) or a particular qualification (e.g., UL listed or recognized), Bourns is not responsible for any failure of an individual Bourns® product to meet the requirements of such industry standard or particular qualification even if such industry standard or qualification is a "state of art". Users of Bourns® products are responsible for ensuring compliance with safety-related requirements and standards applicable to their devices or applications.

Bourns® products are not recommended, authorized or intended for use in applications where failure or malfunction may result in personal injury, death, or severe property or environmental damage, such as without limitation nuclear, life-critical medical and certain automotive and aviation applications. Except as set forth in the bullet points below or unless expressly and specifically approved in writing on a case-by-case basis by an authorized Bourns' representative, use of any Bourns® products in such unauthorized high-risk applications is at the user's sole risk.

- Bourns considers implantable/invasive devices and devices/procedures designed as life-supporting or life-sustaining by the U.S. Food and Drug Administration or equivalent organizations outside of the United States as "life-critical" medical applications. Bourns expressly identifies those Bourns® standard products that are suitable for use in typical medical applications that are not life-critical in its publication entitled "Bourns Medical Grade Component Guide."
- Bourns expressly identifies those Bourns® standard products that are suitable for use in typical automotive applications associated with any Automate Safety Integrity Level (ASIL) in its publication entitled "Bourns Automotive Grade Component Guide." Bourns' designation of Bourns® product as compliant with the AEC-Q standard does not by itself mean that Bourns has approved such product for use in an automotive application.
- Bourns expressly identifies Bourns® standard products that are suitable for use in the typical aviation applications/systems requiring System Design Assurance Level (RTCA DO-254 DAL) of C, D or E in its publication entitled "Bourns Civilian Aerospace/Aviation Grade Component Guide." Bourns does not test its products for compliance with United States Federal Aviation Administration standards or any other generally equivalent governmental organization standard applicable to products designed or manufactured for use in aviation applications. Use of Bourns® standard components in aviation applications associated with RTCA DO-254 DAL A or B without proper approval noted above shall be at the user's sole risk.
- Bourns will review and authorize on a case-by-case basis the use of Bourns® standard products which are at least AEC-Q compliant in space-related civil applications (rockets, satellites) with a negotiated cross-waiver and indemnity agreement.

The use and level of testing applicable to Bourns® custom products shall be negotiated on a case-by-case basis by Bourns and the user for which such Bourns® custom products are specially designed. Absent a written agreement between Bourns and the user regarding the use and level of such testing, the above provisions applicable to Bourns® standard products shall also apply to such Bourns® custom products.

Use of Bourns® products or Bourns' technology in military/defense applications must be reviewed with Bourns for compliance with applicable export control laws and embargoes. Users shall not sell, transfer, export or re-export (which includes transfers within a country) any Bourns® products or technology or technical data for use in activities which involve the design, development, production, use or stockpiling of nuclear, chemical or biological weapons or missiles, nor shall they use Bourns® products or technology or technical data in any facility which engages in activities relating to such devices. Further, Bourns® products and Bourns' technology and technical data may not under any circumstance be exported or re-exported to countries subject to international sanctions or embargoes. Bourns® products and technology may not, without prior authorization from Bourns and/or the Government of a country where such product/technology is designed and/or manufactured, be resold, transferred, or re-exported (including within the same country) to any party not eligible to receive commodities, software, and technical data originating in such country.

To the maximum extent permitted by applicable law, Bourns disclaims (i) any and all liability for special, punitive, consequential, incidental or indirect damages or lost revenues or lost profits, and (ii) any and all implied warranties (those not based on parameters specified in Bourns' data sheets and/or specifications), including implied warranties of fitness for particular purpose, non-infringement and merchantability.

For your convenience, copies of this Legal Disclaimer Notice with German, Spanish, Japanese, Traditional Chinese and Simplified Chinese bilingual versions are available at:

Web Page: <https://www.bourns.com/legal/disclaimers-terms-and-policies>

PDF: <https://www.bourns.com/docs/Legal/disclaimer.pdf>