

## Features

- Two resistance-matched PTCs in a ceramic housing
- Aids compliance with:
  - ITU-T K.20/21/45
  - Telcordia GR-1089-CORE
  - UL 60950, 3rd Ed.
- Narrow resistance tolerance
- RoHS compliant\*



This series is obsolete. The [CMF-SDP](#) series is a suggested replacement.

## Applications

Used as a secondary overcurrent protection device in:

- Customer Premise Equipment (CPE)
- Central Office (CO)
- Access equipment

# CMF-RD Series - Telecom CPTC Resettable Fuses

## Electrical Characteristics

| Model       | Induction Voltage Withstand | Rated Voltage | Rated Resistance (RN) |           | Resistance Matching in Housing | Hold Current | Hold Current | Trip Current | Imax @ 230 VAC | Time to Trip @ Imax / 230 VAC |
|-------------|-----------------------------|---------------|-----------------------|-----------|--------------------------------|--------------|--------------|--------------|----------------|-------------------------------|
|             | VAC                         | Volts         | Ohms                  | Tolerance | Ohms                           | Amps @ 25 °C | Amps @ 40 °C | Amps @ 25 °C | Amps           | Seconds                       |
| CMF-RD50    | 600                         | 230           | 50                    | ±20 %     | ± 0.5                          | 0.09         | 0.06         | 0.19         | 3.0            | < 0.1                         |
| CMF-RD50-10 | 600                         | 230           | 50                    | ±10 %     | ± 0.5                          | 0.09         | 0.06         | 0.19         | 3.0            | < 0.1                         |

## Test Procedures And Requirements For Model CMF-RD Series


| Test                                   | Primary Protection | Test Condition   | Requirements*        |
|--|--------------------|--|----------------------|
| Mains Power Contact - ITU-T K.20, K.21 | None               | 230 V rms, 10 ohms, 15 Min.                              | (Ri-Rf) / Ri < ±10 % |
| Power Induction - ITU-T K.20, K.21     | None               | 600V rms, 600 ohms, 0.2 seconds, 10 cycles, every 1 Min. | (Ri-Rf) / Ri < ±10 % |
| Power Induction - ITU-T K.20, K.21     | GDT                | 600 V rms, 600 ohms, 1 second, 10 cycles, every 1 Min.   | (Ri-Rf) / Ri < ±10 % |
| Power Induction - ITU-T K.20, K.21     | GDT                | 600 V rms, 200 ohms, 1 second, 10 cycles, every 1 Min.   | (Ri-Rf) / Ri < ±10 % |
| Lightning Surge - ITU-T K.20, K.21     |                    | 10/700 μs, 25 ohms, 1.0 kV, 10 Tests, every 1 Min.       | (Ri-Rf) / Ri < ±10 % |
| Lightning Surge                        |                    | 10/1000 us, 40 ohms, 1.0 kV, 30 Tests, every 3 Min.      | (Ri-Rf) / Ri < ±10 % |
| Overtoltage Withstand                  |                    | 300 V, 3 A, 4 Hours, 1 Time                              | (Ri-Rf) / Ri < ±10 % |
| Failure Mode                           |                    | 300 V, RL=0, 60 Min.                                     | **                   |

Ri = R initial

Rf = R final


\*\* Circuit disconnected or high resistance is acceptable.

## Product Dimensions

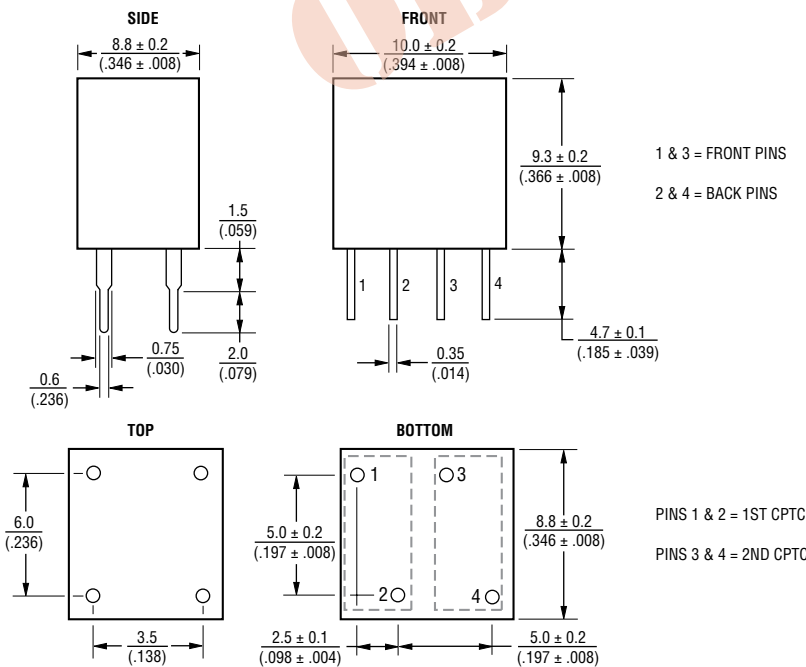


## Typical Part Marking

Represents total content. Layout may vary.

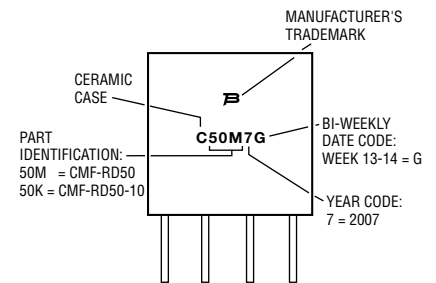

## How to Order

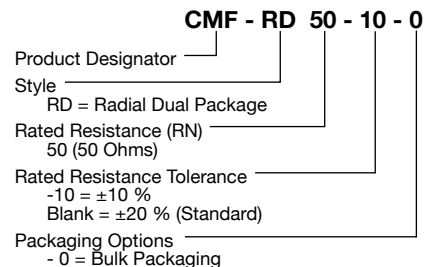

Packaging options: BULK: 96 pcs. per plastic box

DIMENSIONS:  $\frac{\text{MM}}{\text{(INCHES)}}$

CMF-RD SERIES, REV. C, 10/19

\*RoHS Directive 2002/95/EC Jan 27 2003 including Annex.

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at [www.bourns.com/docs/legal/disclaimer.pdf](http://www.bourns.com/docs/legal/disclaimer.pdf).